

Pure Rain™

STORMWATER TREATMENT



FILTRATION SYSTEMS

FLOW TYPE:

Passive

48S TOTE



Simple • Proven • Effective

407 Gallon Totes

External Dimensions:
48 1/8" (L) x 48 1/8" (W)
x 52 1/2" (H)

Internal Dimension:
44 7/8" (L) x 44 7/8" (W)
x 46 1/2" (H)

Available With or Without Lid

Use with Either Filter Media:

BiocharPEAT
Stormwater Treatment Filtration Media

BiocharZAPT
Stormwater Treatment Filtration Media

Stormwater BIOCHAR^{COM}

STORMWATER TREATMENT

TEN **10**
YEARS
STRONG
stormwater treatment
with Biochar

Stormwater **BIOCHAR** LLC

MAIL

6628 SE 68th AVE
Portland OR 97206

PHONE

503-789-6760

EMAIL

info@
Stormwater
BIOCHAR^{COM}

ESB STATE OF OREGON
CERTIFIED
EMERGING SMALL BUSINESS

THE RIGHT **BIOCHAR**,
THE RIGHT **BLEND**, DIALED IN.

Pure Rain™

STORMWATER TREATMENT




FILTRATION SYSTEMS

FLOW TYPE:

Passive

48S TOTE

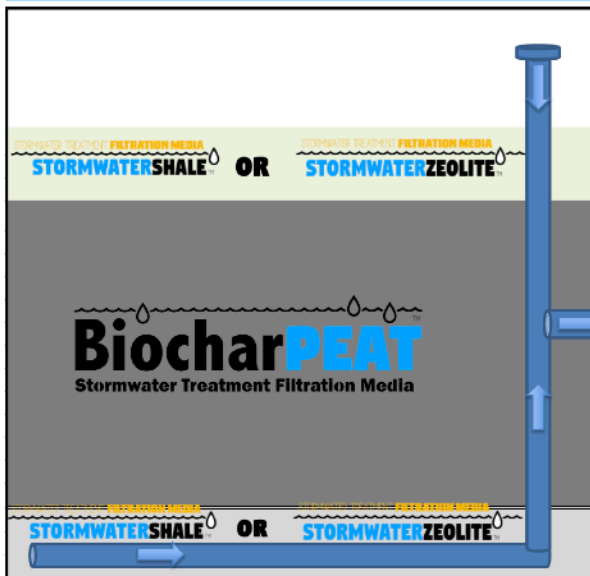

Over Flow Pipe can be either on the outside or inside of the tote.

Water will remain from the bottom of the height of the discharge pipe. A small drip valve/hose is put in at the bottom to slowly release the standing water.



- FDA-approved materials
- Nonporous surfaces
- Rounded corners and smooth surfaces
- Easy-to-sanitize
- Splinter-resistant plastic
- Injection-molded, high-impact resistant copolymer



Stormwater
BIOCHAR.COM

STORMWATER
TREATMENT

Stormwater **BIOCHAR**.COM
Biochar for stormwater treatment since 2010

THE RIGHT **BIOCHAR**,
THE RIGHT **BLEND**, DIALED IN.

Pure Rain™

STORMWATER TREATMENT



FILTRATION SYSTEMS

FLOW TYPE:

Passive

48S TOTE



Basic Loading of the 48S. (Not to scale)

1" in height = ~1.17 cf

- ~5 cf of **STORMWATER SHALE™** OR **STORMWATER ZEOLITE™** (~5") Cap,
- ~1.25 CY of **Biochar PEAT™** (~30") and
- ~5 cf of **STORMWATER SHALE™** OR **STORMWATER ZEOLITE™** (~5") Base



Stormwater BIOCHAR.com

Biochar for stormwater treatment since 2010

Stormwater BIOCHAR.com

STORMWATER TREATMENT

THE RIGHT **BIOCHAR**,
THE RIGHT **BLEND**, DIALED IN.